

# TH26

series




## Product Segments

### • Care Motion


Connected actuators	1~3
Maximum available buttons	6
Color	black or grey
Protection	IP54 or IP66
Option	back light

## Drawing

Standard Dimension

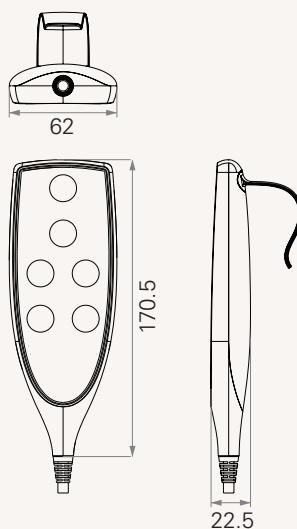

Dimension with Cable Length

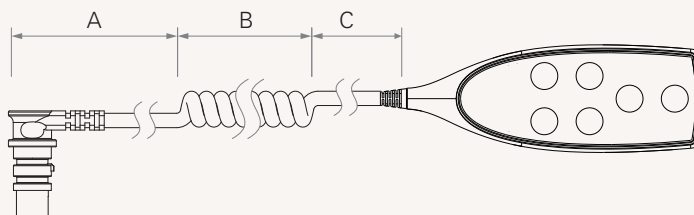

### Cable Length (mm)

CODE	A	B	C
1	1000	300	200
2	1200	300	300
3	1400	300	400
4	2400	0	0
5	0	600	0
6	1000	200	200
A	Customized length		

### Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application.

Due to continuous development in order to improve our products, TiMOTION products are subject to frequent modifications and changes without prior notice.

TiMOTION reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by TiMOTION.

# TH26 Ordering Key

## TH26

Version: 20131122-B

	<b>Back Light</b>	0 = Without	1 = With
	<b>Number of Actuators</b>	1 = 1	2 = 2 3 = 3
	<b>Plug</b>	1 = DIN 8pin, 90°, for TC2/TC3/TC7 2 = RJ 10pin, 90°, for TC1/TC8/TC10 4 = DIN 8pin, 180°, for extension cable	5 = RJ 10pin, 180°, for TC6/TC9/extension cable A = Customized
	<b>Color</b>	1 = Black	2 = Grey (Pantone 428C)
	<b>IP Protection</b>	1 = Without	2 = IP54 3 = IP66
	<b>Key Definition</b>	1~6 = See appendix* Note : please contact TiMOTION before making an order	A = Customized
	<b>Cable Length</b>	1~6 = See appendix	A = Customized
	<b>Hook Type</b>	0 = Without	1 = Standard