


◎ suitable for 3.5mm or less of cable.

Basic technical data

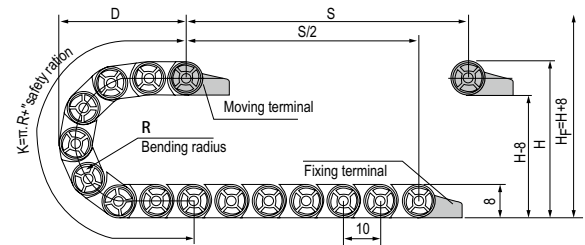


Pitch=10mm, link per meter=100, length of chain= $S/2+K$, S =stroke. $K=\pi \cdot R + \text{"safety ration"}$

R	10	15	18	28
H	28	38	44	64
D	24	29	32	42
K	60	70	80	110

Actual mounting height: $H_f = H + 8\text{mm}$

Drawing

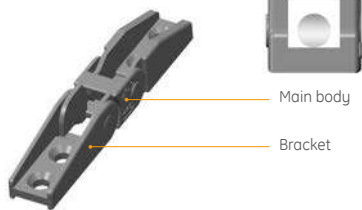


Cable Chain No.	Hi	Bi	Ha	Ba	Styles	Bending radius R	Bracket type and parameters									
							Applicable bracket type		Bore diameter Φ1	(mm) hole distance						Bracket No.
										A	B	C	D	E	F	
JN05Q.1.05B	5	5	8	9	Q.B	10,15,18,28	X ₁		3	8		21		4	9	JN05Q.1.05B-XJT


unit: mm

Note: Q.B Bridge type non-opening, X: oblique bracket, Different serial number indicates the difference rank type of fixing holes

Fix bracket type and parameters (See table)



X₁ type bracket



Connector mounting way

Order Example

Sample: inner height 5mm, inner width 5mm, radius 18mm, length 50 links/0.5 meter

Chain JN05Q.1.05B R18 500mm /50 Links (Physical length: $\pm 2\text{mm}$)

Bracket JN05Q.1.05B-XJT 1 (Set)

Accessories